Grease separator in HDPE

STORA

Septor GS10

CE **EN1825**

- With sludge trap
- 1 inlet
- 1 outlet

Size	Total length	Length	Width	Total Height	HE	HS	N
l/s	mm	mm	mm	mm	mm	mm	mm
10	3460	3370	1633	1152	752	722	430

Dn	Dn	Volume		Opening(s)			Weight
In	Out	Sludge trap	Sep.	Ext. ring	Free way	Number	
mm	mm	L	L	D1 mm	D2 mm		kg
160	160	1000	2000	830	630	3	240

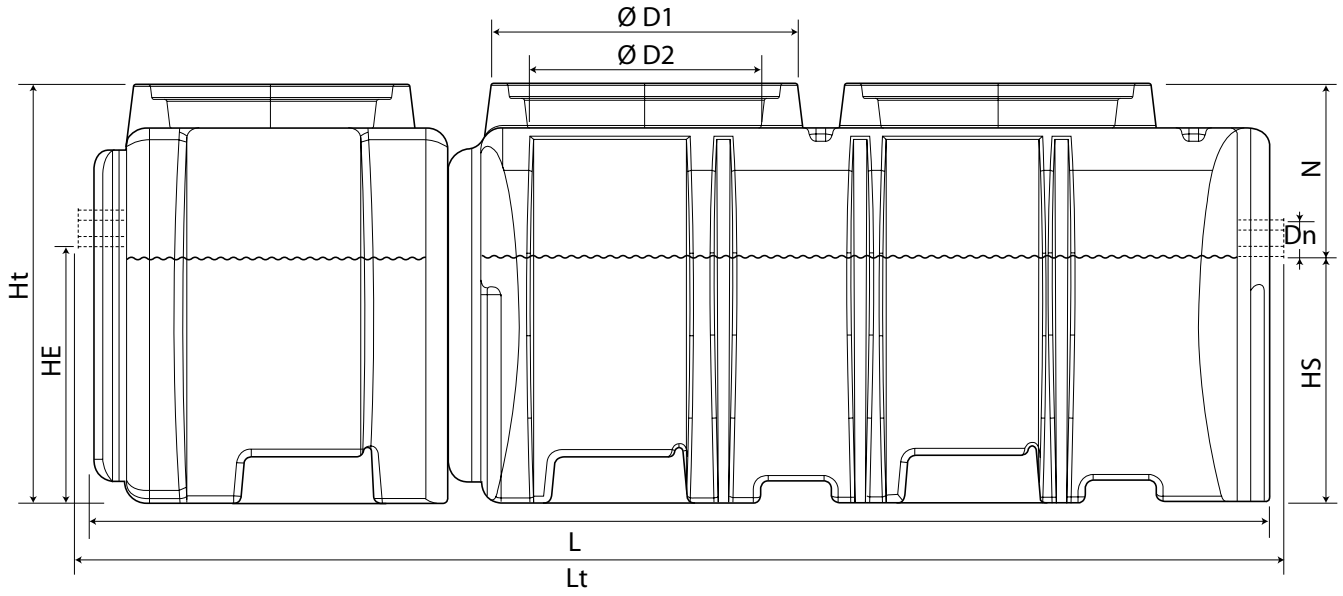

- HDPE tank resistant to microbial corrosion.
- Polyethylene stands to chemical stuff, especially oil, detergent, grease…
- Stabilised UV, does not freeze, resistance up to 60°C.
- High mechanical performance: round shaped tank.
- Internal parts in HDPE or Stainless Steel.
- In and outlets in HDPE adaptable to PVC.
- Round extension shafts Ø 630 mm: easier to inspect.
- Sludge trap really proportioned according to standards EN1825.
- Waterproof guarantee: no outer screws.
- Handles.
- Lifting eye bolts.

STORA s.r.o. **Registred office: Zelný trh 1249, 686 01 Uherské Hradiště, CZ**
Office and warehouse: Osvobození 1692, 686 04 Kunovice, CZ
+420 725 570 926 stora@stora.cz www.stora.cz

COLLINET PRODUCT WATER TECHNOLOGY